


# CSR Lamps

The GE CSR4000/SE/HR lamp is a metal halide lamp with an outer jacket and an arc gap of 24 mm providing greater optical control and luminance. This lamp is compact and suitable for hot restrike applications. The CSR4000/SE/HR is mainly used in event lighting, studio, and film lighting.

## Product Description CSR4000/SE/HR

•Order Description	CSR4000/SE/HR
•Product Code	48466
•Pack Quantity	6
•Rated Wattage	4,000W
•Rated Voltage	200± V
•Lamp Current (ECG/MCG)*	20.0A
•Ignition Voltage (cold/hot)	5/55(MAX)
•Lumens	380,000 Lm
•Lumens per watt	95
•Ra	>90
•Chromaticity coordinates	x 0.323 y 0.328
•Color temperature	6,000K
•Arc Length	24(MAX)mm
•Lamp length	MAX260
•Light center length	142±
•Lamp diameter	MAX76
•Average rated life	500
•Base	G38

\*ECG = electronic control gear/ MCG = Magnetic control gear

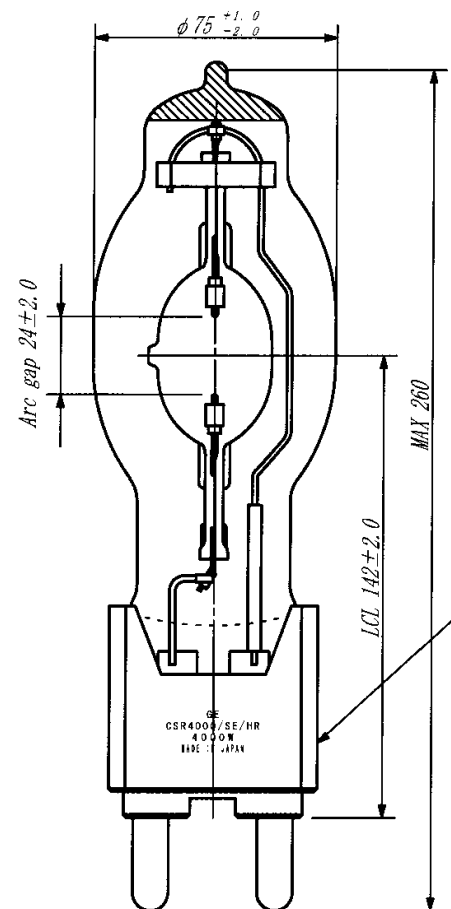

## Lamp Operation

Burn Position	Any
Maximum Seal Temperature	350° C
Cooling	Forced Cooling/Fan
Lamp can be used on electronic or AC magnetic Ballast/igniters	

## Application Information

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life
- Do not exceed rated seal temperature
- Use only with properly rated fixtures and ballasts



GE imagination at work

GE and General Electric are both registered trademarks of the General Electric Company, USA. © General Electric Company (USA) 2006

GE Consumer & Industrial Specialty Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

CSR4000/SE/HR - Data sheet - July 2006