


CSR Lamps

The GE CSR575/2/SE lamp is a single ended metal halide lamp with an outer jacket . It's small arc gap of 7 mm provides greater optical control and luminance. This lamp is compact, highly efficient, and at 7200K provides a white bright light. It is a cold start lamp with a maximum seal temperature of 350° C . The CSR575/2/SE is mainly used in event lighting.

Product Description CSR575/2/SE

•Order Description	CSR575/2/SE
•Product Code	15378
•Pack Quantity	10
•Rated Wattage	575W
•Rated Voltage	97(+15-10)V
•Lamp Current (ECG/MCG)*	5.9A
•Ignition Voltage (cold/hot)	4.5
•Lumens	46,000 Lm
•Lumens per watt	80
•Ra	>65
•Chromaticity coordinates	x 0.302 y 0.320
•Color temperature	7,200K
•Arc Length (C)	7.0±1.0mm
•Lamp length (A)	MAX125
•Light center length (B)	65±1.0
•Lamp diameter	MAXφ29
•Average rated life	1,000hr
•Base	GX9.5

*ECG = electronic control gear/ MCG = Magnetic control gear

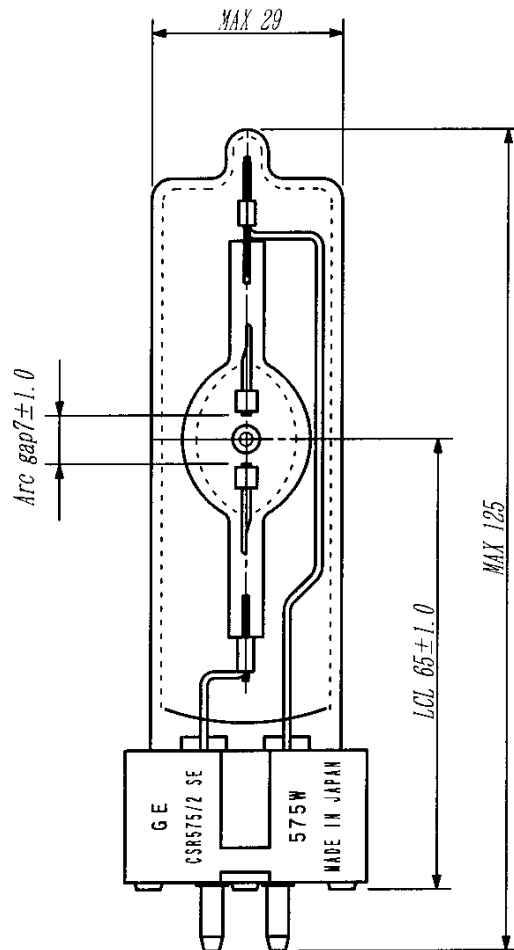

Lamp Operation

Burn Position Any
Maximum Seal Temperature 350° C
Cooling Forced Cooling/Fan
Lamp can be used on electronic or AC magnetic
Ballast/igniters

Application Information

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life
- Do not exceed rated seal temperature
- Use only with properly rated fixtures and ballasts



GE imagination at work

and General Electric are both registered trademarks of the General Electric Company, USA. © General Electric Company (USA) 2006

GE Consumer & Industrial Specialty Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

CSR575/2/SE - Data sheet - April 2008