



F28WT5 High Lumen

5% Higher Lumen Output vs. Standard F28WT5 Lamps

- Reduce maintenance costs: High lumen lamps output allow shift from 3-lamp T12/T8 systems to 2-lamp T5 systems
- Ideal solution for indirect lighting applications
- 3050 initial lumens vs. 2900 lumens for standard T5
- 20,000 hour rated life
- Environmentally conscious: TCLP compliant




	T12	T8	T5 *	
Lamp Type	F34T12	F32T8	F28WT5/HL	F28WT5/HL
Number of Lamps	3	3	2	2
Initial Lumens	2650	2800	3050	3050
Ballast Factor	0.90	0.77	1.15	0.95
Lumen Output	7155	6468	7015	5795
Light Loss		-9%	-2%	-19%
System Wattage*	114	73	70	57
LPW	63	89	100	102
% Energy Savings		36%	39%	50%

* Maximize savings by using GE UltraStart® T5 ballasts

F28WT5 High Lumen

P/C	Description	Watts	Lumens		Color Temp	CRI	Rated Life		Nominal Length (in.)	Case Qty
			Initial	Mean			3hrs/start	12hrs/start		
71652	F28WT5/830HL/ECO	28	3,050	2,810	3000	85	20,000	24,000	45.2	40
71653	F28WT5/835HL/ECO	28	3,050	2,810	3500	85	20,000	24,000	45.2	40
71654	F28WT5/841HL/ECO	28	3,050	2,810	4100	85	20,000	24,000	45.2	40
71655	F28WT5/850HL/ECO	28	2,900	2,670	5000	85	20,000	24,000	45.2	40
71656	F28WT5/865HL/ECO	28	2,850	2,620	6500	85	20,000	24,000	45.2	40

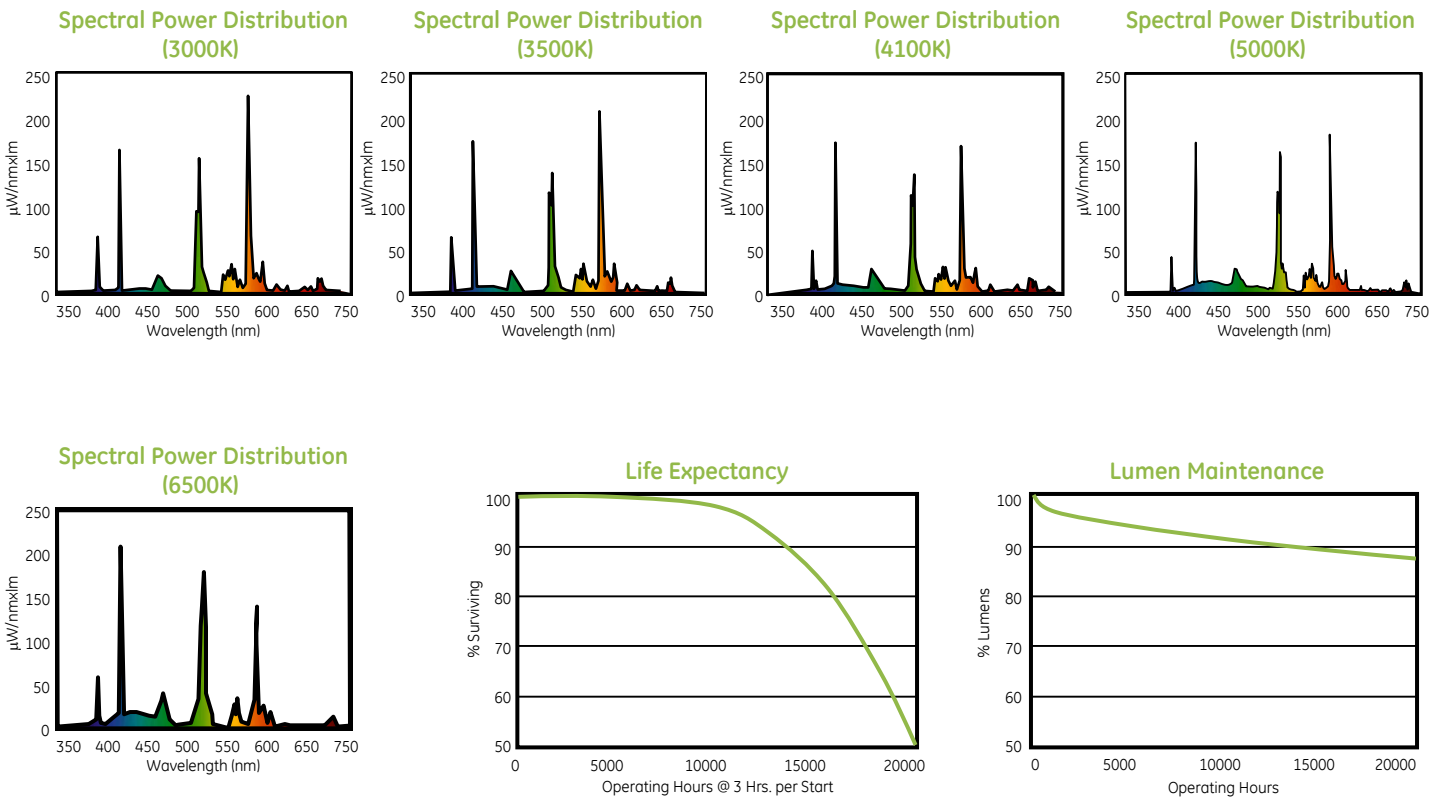

For additional product and application information, please consult GE's Website: www.gelighting.com

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.