

GE Consumer & Industrial
Lighting



T5 High Efficiency Watt-Miser® Lamps

Save 5% Energy per Lamp
vs. Standard Lamps!

- Save 5% on wattage by lamp type
- Same light output as standard T5 lamps
- Ideal solution for indirect lighting applications
- Compatible with existing T5 ballasts; maximize savings using GE UltraStart® T5 ballasts
- 25,000 hour rated life
- Environmentally conscious: TCLP compliant
- All lamps offered in the following colors:
3000K/3500K/4100K/5000K/6500K




Description	Actual Wattage	Lumen Output	Lumens Per Watt	Energy Savings*
F14T5/WM	13W	1350 lumens	104	\$2.50
F21T5/WM	20W	2100 lumens	105	\$2.50
F28T5/WM	26W	2900 lumens	112	\$5.00
F35T5/WM	33W	3650 lumens	111	\$5.00

* Nominal per lamp wattage savings at 10¢ per kWh over the life of the lamp


High Efficiency Watt-Miser® Lamps

P/C	Description	Watts	Lumens		Color Temp	CRI	Rated Life		Nominal Length (in.)	Case Qty
			Initial	Mean			3hrs/start	12hrs/start		
71632	F14T5/830/WM/ECO	13	1,350	1,240	3000	85	25,000	30,000	21.6	40
71633	F14T5/835/WM/ECO	13	1,350	1,240	3500	85	25,000	30,000	21.6	40
71634	F14T5/841/WM/ECO	13	1,350	1,240	4100	85	25,000	30,000	21.6	40
71635	F14T5/850/WM/ECO	13	1,300	1,190	5000	85	25,000	30,000	21.6	40
71636	F14T5/865/WM/ECO	13	1,250	1,150	6500	85	25,000	30,000	21.6	40
71637	F21T5/830/WM/ECO	20	2,100	1,930	3000	85	25,000	30,000	33.4	40
71638	F21T5/835/WM/ECO	20	2,100	1,930	3500	85	25,000	30,000	33.4	40
71639	F21T5/841/WM/ECO	20	2,100	1,930	4100	85	25,000	30,000	33.4	40
71640	F21T5/850/WM/ECO	20	2,000	1,840	5000	85	25,000	30,000	33.4	40
71641	F21T5/865/WM/ECO	20	1,950	1,790	6500	85	25,000	30,000	33.4	40
71642	F28T5/830/WM/ECO	26	2,900	2,660	3000	85	25,000	30,000	45.2	40
71643	F28T5/835/WM/ECO	26	2,900	2,660	3500	85	25,000	30,000	45.2	40
71644	F28T5/841/WM/ECO	26	2,900	2,660	4100	85	25,000	30,000	45.2	40
71645	F28T5/850/WM/ECO	26	2,750	2,530	5000	85	25,000	30,000	45.2	40
71646	F28T5/865/WM/ECO	26	2,700	2,480	6500	85	25,000	30,000	45.2	40
71647	F35T5/830/WM/ECO	33	3,650	3,350	3000	85	25,000	30,000	57.1	40
71648	F35T5/835/WM/ECO	33	3,650	3,350	3500	85	25,000	30,000	57.1	40
71649	F35T5/841/WM/ECO	33	3,650	3,350	4100	85	25,000	30,000	57.1	40
71650	F35T5/850/WM/ECO	33	3,500	3,220	5000	85	25,000	30,000	57.1	40
71651	F35T5/865/WM/ECO	33	3,400	3,120	6500	85	25,000	30,000	57.1	40


Spectral Power Distribution (3000K)

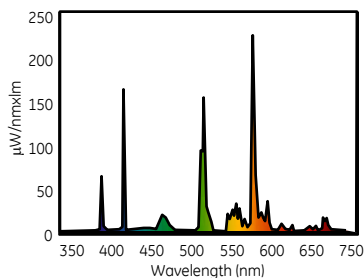


Spectral Power Distribution (3500K)

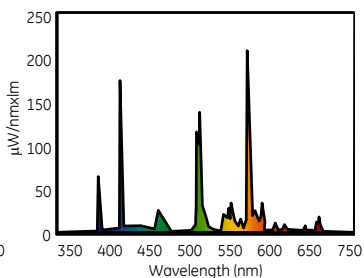


Spectral Power Distribution (4100K)

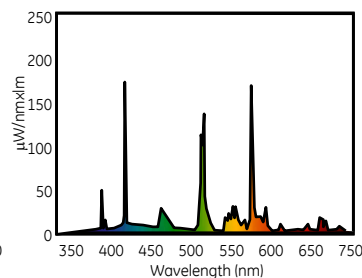


Spectral Power Distribution (5000K)

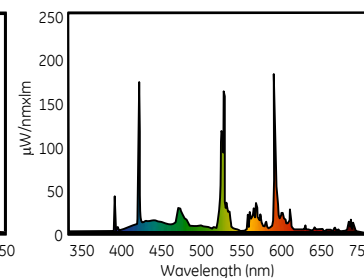


Spectral Power Distribution (6500K)

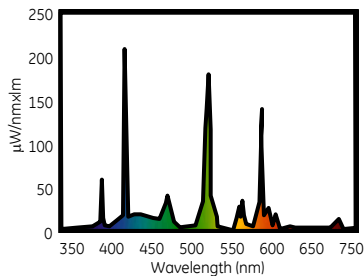

Life Expectancy

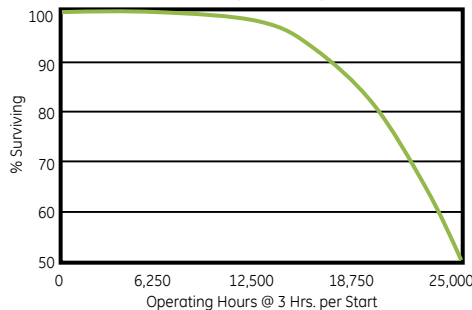

Lumen Maintenance

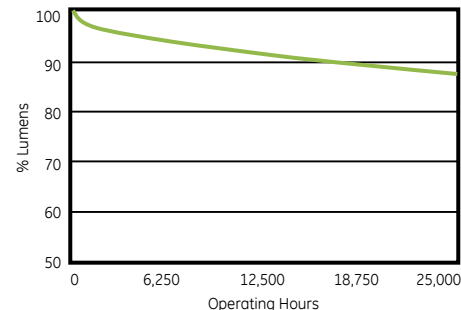

For additional product and application information, please consult GE's Website: www.gelighting.com

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.