



T8 Mod-U-Line[®] Ecolux[®] Lamps

Save up to \$5.40 per fixture
with Watt-Miser[®] version

- Reduce energy costs 6% with Watt-Miser[®]
- Environmentally conscious: TCLP compliant
- Three solutions to meet your needs



New Mod-U-Line
Watt-Miser[®]
saves 6% Energy
vs. standard
F32T8/U6 lamps



F32T8/SPX/U6/WM/ECO

- 2800 initial lumens vs. 2700 lumens for standard T8/U6 lamp
- 18,000 hour rated life on IS ballast at 3Hrs/start
- Excellent color rendering. SPX lamp with CRI = 85
- Mod-U-Line[®] lamp with 6" leg spacing

F32T8/SPX/U6/ECO

- Excellent color rendering. SPX lamp with CRI = 85
- 20,000 hour rated life on IS ballast at 3Hrs/start
- Mod-U-Line[®] lamp with 6" leg spacing

F31T8/SPX/U/ECO

- Mod-U-Line lamp with 1-5/8" leg spacing
- Environmentally conscious: TCLP compliant
- 24,000 hour rated life on IS ballast at 3Hrs/start

System Watts Saved: 3

Lamps per Fixture: 2

Relamp Existing F32T8/SP/U6
with F32T8/SPX/U6/WM/ECO

	Ballast Factor	System Watts	Initial System Lumens	
F32T8/U6	.77	51	4158	
F32T8/U6/WM	.77	48	4312	
Operating Hours / Year			Over Lamp Life	
KWH Rate	4000	5500	8760	8000
\$ 0.060	\$ 0.72	\$ 0.99	\$ 1.58	\$ 3.24
\$ 0.080	\$ 0.96	\$ 1.32	\$ 2.10	\$ 4.32
\$ 0.100	\$ 1.20	\$ 1.65	\$ 2.63	\$ 5.40
\$ 0.120	\$ 1.44	\$ 1.98	\$ 3.15	\$ 6.48

T8 Mod-U-Line® Ecolux® Specs

T8 U6 Watt-Miser Ecolux


P/C	Description	Case Qty	Nominal Watts	Rated Life 3hrs/start	Lumens		Color Temp		Nominal Length (in.)	Maximum Overall	Max Base Face to Top of Lamp (in.) (B)	Leg Spacing (in.) (C)
					Initial	Mean	(K)	CRI		Length (in.) (A)		
72114	F32T8/SPX30/U6/WM/ECO	12	30	18,000	2,800	2,632	3000	85	22.5	23.0	22.6	6.0
72115	F32T8/SPX35/U6/WM/ECO	12	30	18,000	2,800	2,632	3500	85	22.5	23.0	22.6	6.0
72116	F32T8/SPX41/U6/WM/ECO	12	30	18,000	2,800	2,632	4100	85	22.5	23.0	22.6	6.0

T8 U6 SPX Ecolux

P/C	Description	Case Qty	Nominal Watts	Rated Life 3hrs/start	Lumens		Color Temp		Nominal Length (in.)	Maximum Overall	Max Base Face to Top of Lamp (in.) (B)	Leg Spacing (in.) (C)
					Initial	Mean	(K)	CRI		Length (in.) (A)		
72111	F32T8/SPX30/U6/ECO	12	32	20,000	2,850	2,622	3000	85	22.5	23.0	22.6	6.0
72112	F32T8/SPX35/U6/ECO	12	32	20,000	2,850	2,622	3500	85	22.5	23.0	22.6	6.0
72113	F32T8/SPX41/U6/ECO	12	32	20,000	2,850	2,622	4100	85	22.5	23.0	22.6	6.0

T8 U1 5/8 Ecolux

P/C	Description	Case Qty	Nominal Watts	Rated Life 3hrs/start	Lumens		Color Temp		Nominal Length (in.)	Maximum Overall	Max Base Face to Top of Lamp (in.) (B)	Leg Spacing (in.) (C)
					Initial	Mean	(K)	CRI		Length (in.) (A)		
72117	F31T8/SPX30/U/ECO	15	31	24,000	2,775	2,636	3000	85	22.5	23.0	22.6	1.625
72118	F31T8/SPX35/U/ECO	15	31	24,000	2,775	2,636	3500	85	22.5	23.0	22.6	1.625
72119	F31T8/SPX41/U/ECO	15	31	24,000	2,775	2,636	4100	85	22.5	23.0	22.6	1.625

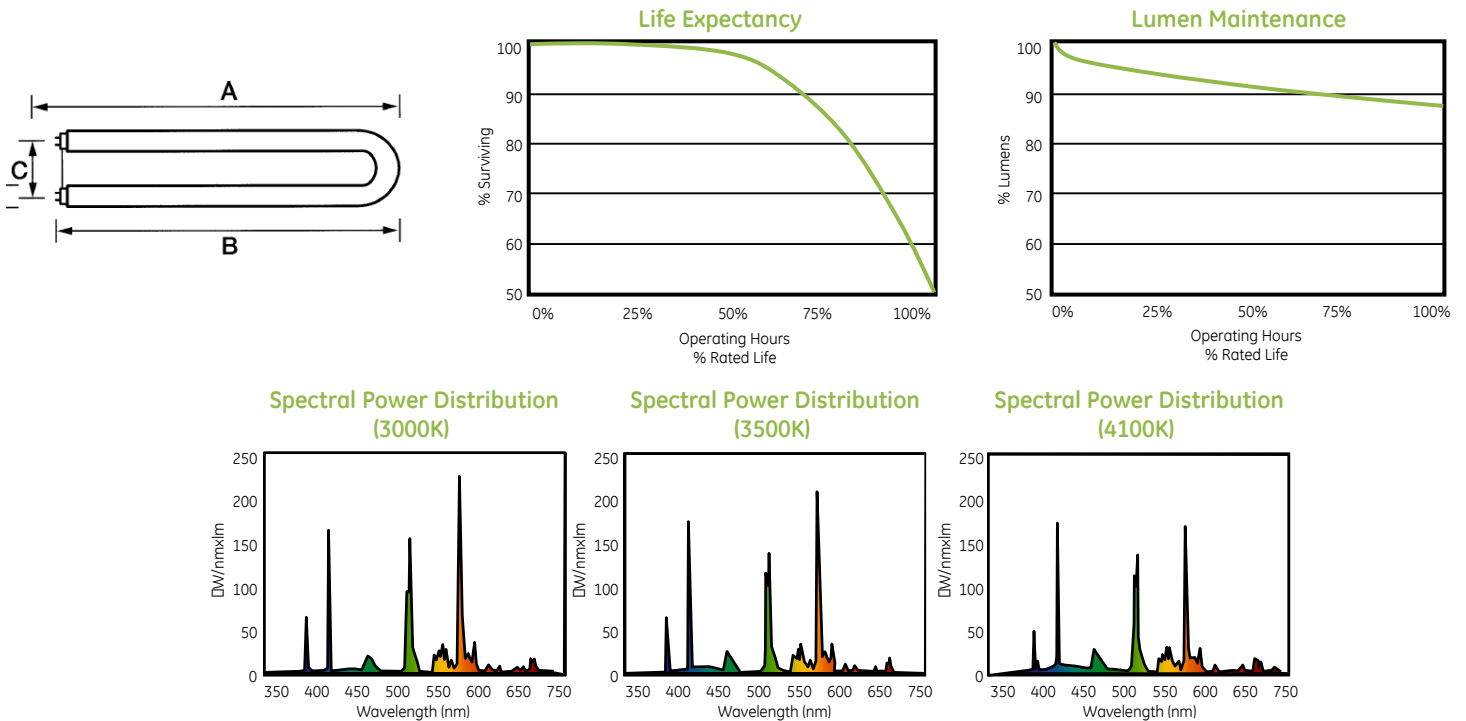

For additional product and application information, please consult GE's Website: www.gelighting.com

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.