

# ONE TOUGH BULB. BUILT TO LAST.

## GE SURVIVOR™ XL BULBS



The best combination of benefits to meet the demands of commercial and industrial use. The GE name assures you'll get the quality, durability and reliability you expect.

**Built tough to last**, even under many "rough service" conditions. Survivor XL bulbs have extra filament supports to protect the bulb against early burn-outs caused by bumps, jars and vibration. This tougher design makes them suitable for many rough service applications.

**Xtra Life... lasts 3,000 hours**, three to four times longer than standard bulbs.\* XL means Xtra Life and Survivor XL's stronger, single coil filament increases lamp life, reducing inconvenience and hazard of burned out bulbs.

### Applications

- Office
- Hotel/Motel
- Industrial
- Restaurant
- Hallways
- Stairways
- Guest Rooms
- Security Areas
- Storage Areas

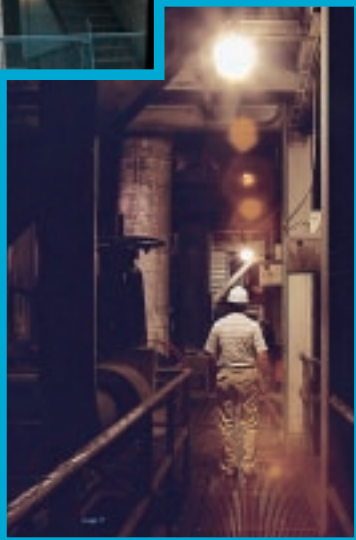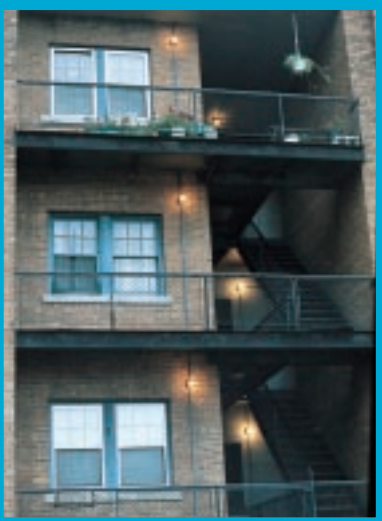

### For super long life 130-volt Survivor XL...

8,500 hours on 120V circuit! For even longer life, 130-volt Survivor XL bulbs can be used on 120-volt circuits to provide an average life of 8,500 hours. That's more than two years of service at 10 hours per day, one year of continuous operation.\*

**Brass base avoids corrosion**, assures easy lamp removal.

**Economically priced**. Survivor XL is an economically priced alternative to provide the best all-around service in commercial and industrial applications.

\* All long life incandescent bulbs trade light output for extra life. Survivor XL bulbs provide a 300% to 400% increase in life with 68% to 75% of the light of ordinary bulbs.

† Operated in this manner, the 130-volt Survivor XL consumes only 88% of its rated watts and provides 75% of its rated light output.



**GE Lighting**

# GE Survivor™ XL Bulbs

## Performance Data

	WATTS	PRODUCT CODE	ORDERING CODE	VOLTS	BULB SIZE	FILAMENT DESIGN	BASE SIZE	TYPE	AVG. LIFE (HRS) RATED @120V	APPROX. LUMENS RATED @120V	STD. PKG. QTY.
120-volt	60	40324	60A/S	120	A-19	C-9	Medium	Brass	3,000	—	24
	75	40326	75A/S	120	A-19	C-9	Medium	Brass	3,000	815	24
	100	40329	100A/S	120	A-19	C-9	Medium	Brass	3,000	1190	24
	150	15817	150A/S	120	A-21	C-9	Medium	Brass	3,000	1925	60
130-volt	40	40323	40A/S	130	A-19	C-9	Medium	Brass	3,000 8,500	370 273	24
	60	40325	60A/S	130	A-19	C-9	Medium	Brass	3,000 8,500	625 462	24
	75	40328	75A/S	130	A-19	C-9	Medium	Brass	3,000 8,500	815 604	24
	100	40330	100A/S	130	A-19	C-9	Medium	Brass	3,000 8,500	1190 941	24
	150	15818	150A/S	130	A-21	C-9	Medium	Brass	3,000 8,500	1925 1443	60


## Packaging Summary

LAMP TYPE	CASE				PALLET CASES PER LAYER	LAYERS PER PALLET	LAMPS PER PALLET
	LAMP QTY	DIMENSIONS	CUBE	WEIGHT			
40-100-Watt	24	16" x 8" x 5"	.345'	2.0 lbs.	15	8	2880
150-Watt	60	16.9" x 14" x 11.8"	1.61'	7.0 lbs.	9	4	2160

## Built Stronger to Last Longer

Stronger, single coil filament increases lamp life.


Extra filament supports add durability to resist bumps and jars and extend life.

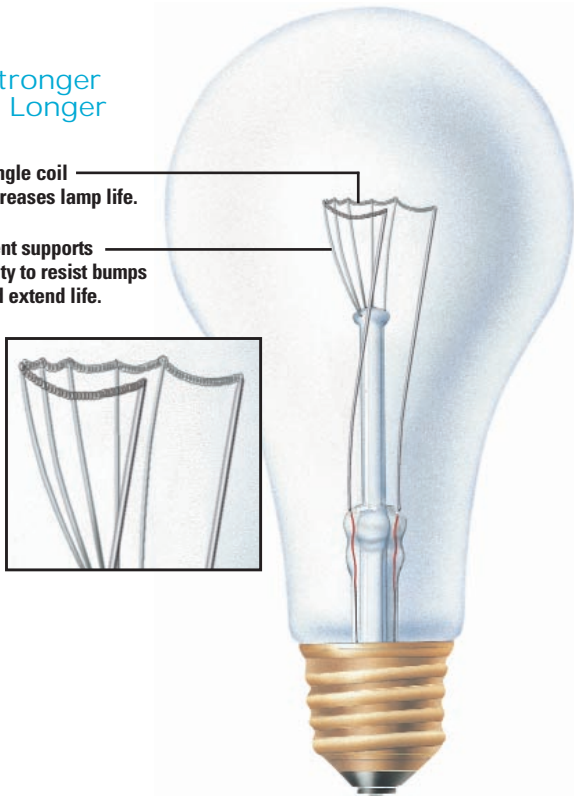

One 130V Survivor XL bulb




3 - 4 Standard bulbs



One 130V Survivor XL bulb  
*Operated at 120V*



8 - 11 Standard 120V bulbs



**GE Lighting**  
We bring good things to life.