Cync reveal® HD+ Smart Undercabinet Pucks Specifications

Box Contents



- (3) reveal® HD+ Smart Undercabinet Pucks
- (1) 60in Power Cord
- (3) 12in Linking Cables
- (6) Mounting Screws
- (7) Cable Clips
- (1) Terminal Cap
- (1) Double-sided Tape
- (1) Installation Guide

Specifications

Device	
Lamp Description	CFIXUNCPK03CRVDMS
Max. Supported Linked Pucks	10
Bulb Diameter	3in
Lumens* (Brightness)	300
Lumens per Watt	60
Life (Hours)	50,000
CRI	90
CCT Range	2000-7000K
Color Range	16 Million Colors

Hardware

Operating $-4^{\circ}\text{F to } 104^{\circ}\text{F } (-20^{\circ}\text{C to } 40^{\circ}\text{C})$ Temperature

Base Type Plug-in

Dimensions (LxWxH) 3.1 x 3.1 x .98in (79 x 79 x 25mm)

Weight 0.243lbs (110g)

Finish White

Environment
(Wet, Dry, Damp)

Electrical

 Input Voltage
 120V

 Start Time
 0.5s

 Power Factor
 >0.65

 Power
 5W

 Current
 60mA

Controls

Dimmable Ye

Dimmer Type Dimmable though Cync App, Cync Remotes and Cync Dimmers

Wireless Protocol Wi-Fi (2.4 GHz) and BLE

Matter Compatible Yes

Mobile Compatibility Works with iOS 13 and above and Android 9 and above

Voice Assistant Compatibility Works with Google Home and Amazon Alexa

Certifications

 Safety Listing
 UL153-2023

 FCC ID
 PUU-CFIXCNLRCRV

 IC
 10798A-CFIXCNLRCRV



Reliability and Warranty

Warranty 5 Years

Warranty Operating Operating Voltage


Conditions

Operating Temperature -4°F to 104°F (-20°C to 40°C)

120Vac. 60Hz

Operating Humidity RH < 88% 32°C

Device Overview

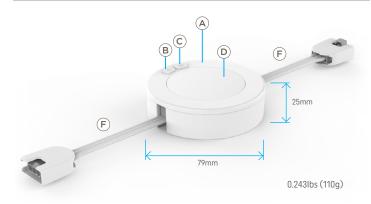













- (A) Undercabinet Puck Fixture
- B On/Off Toggle Button Quick press to turn on or off. Press and hold for 10 seconds to factory reset the device.

Color Cycle Button - Quick press to cycle through preset colors and temperatures. (3000K, 4000K, 5000K, 2000K, Red, Orange, Yellow, Pink, Green, Blue, Teal, and Purple). Press and hold to increase/decrease brightness. Pause for 3 seconds at maximum or minimum dimming level to change brightness in opposite direction.

- (D) 3in LED
- (E) Power Cord
- (F) Linking Cables
- (G) Mounting Screws
- (H) Cable Clip
- (I) Terminal Cap
- J Double-sided Tape